

POS Peripherals



POS PRINTER

Model	PR-95
Printing method	Direct Thermal
Printing speed	220 mm / sec (max)
Paper width	79.5 ± 0.5 mm
Printer interface	USB Only Serial, USB & Ethernet
Cutter	Full or Partial cut
Reliability	Head 150 km / Auto Cutter 1.5 Million
Power supply	DC 24 V / 1.5 A Adaptor
Cash drawer interface	RJ-11 Connector
Software driver	Windows Drivers (7 & 10), ESC/POS, OPOS Driver, JPOS Driver, CUPS Driver, Virtual COM USB Driver, Android & iOS SDK.






CASH DRAWER

Model	HS-410A
Interface	24 V DC/1 A, RJ-11 Connector (compatible with PR-Series printer)
MOC	Body-Metal, Tray-ABS Plastic, Clip-Metal
Tray	5 bill, 8 Coin
Security	Lock & Key
Dimension	410 (W) x 405 (D) x 90 (H) mm
Software driver	ESC/POS, OPOS, JPOS (Windows 7 & 10)



CUSTOMER DISPLAY

Model	CD-615P
Display type	Graphic LCD with Green back light
Mounting	Stand-alone Pole Type
Characters	20 x 2 Lines
Interface	Serial (RS-232C)
Power supply	12 V Adaptor
Software driver	ESC/POS, OPOS (Windows 7 & 10)

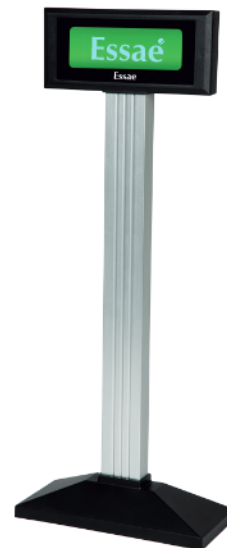

Form no.: CAT-POS Peripherals-032 R09

Essae-Teraoka Pvt. Ltd.

410, 100ft Road, 4th Block,
Koramangala, Bengaluru - 560 034
info@essae.com
<http://www.essae.com>

+91 80 2511 3021
1-800-425-3111
0-78488 12346

Essae[®]
...for Excellence

Your Essae representative

Note: Specifications are subject to change without notice. Other names and logos used are property of respective brands.